



# Linear system **DLT/DLK 120 P, 160 P, 200 P**

## SPINDLE DRIVE

INDEPENDENT INSTALLATION POSITION

PRECISION

COVER PROFILE

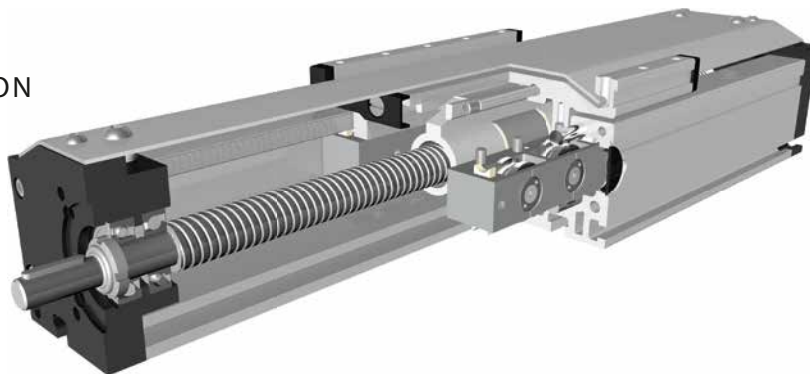

### Function:

This unit consists of a rectangular aluminium profile with 2 integrated roller guides. The carriage is driven by means of a rotating spindle with leading nut. Where two parallel linear units are used or where two carriages are mounted on one unit, the leading-nut receiver can be used to adjust the symmetry of the carriages. A special curved aluminium sheet is covering the carriage side. There is only a small gap between carriage and aluminium sheet.

### Fitting position:

As required. Max. length DLT/K 120P / 1600mm, DLT/K 160P / 1800mm, DLT/K 200P / 2000mm

### Carriage mounting:

By tapped holes in the carriage.

### Unit mounting:

By T-slots and mounting sets. The linear axis can be combined with any T-slot profile.

### Carriage support:

In the standard version, the carriage runs on 8 rollers which can be adjusted and serviced at a central servicing position. For longer carriages the number of rollers can be increased. Repeatability ballscrew  $\pm 0,025$  mm, trapezoidal thread  $\pm 0,2$  mm.

8.1

Forces and torques	Size	120		160		200	
	Forces/Torques	static	dynamic	static	dynamic	static	dynamic
	$F_x$ (N)	900	800	5000	4000	10000	8000
	$F_y$ (N)	1100	900	3000	2000	4400	3100
	$F_z$ (N)	1250	1000	3500	2800	4900	4400
	$M_x$ (Nm)	150	125	400	320	600	510
	$M_y$ (Nm)	140	120	360	300	560	480
	$M_z$ (Nm)	100	90	180	150	310	275
<b>All forces and torques related to the following:</b>							
existing values $\frac{F_y}{F_{y_{dyn}}} + \frac{F_z}{F_{z_{dyn}}} + \frac{M_x}{M_{x_{dyn}}} + \frac{M_y}{M_{y_{dyn}}} + \frac{M_z}{M_{z_{dyn}}} \leq 1$							
table values $\frac{F_y}{F_{y_{dyn}}} + \frac{F_z}{F_{z_{dyn}}} + \frac{M_x}{M_{x_{dyn}}} + \frac{M_y}{M_{y_{dyn}}} + \frac{M_z}{M_{z_{dyn}}} \leq 1$							
<b>No-load torque</b>							
Trapezoidal thread	18 x 4	18 x 8	24 x 5	24 x 10	32 x 6	32 x 12	
(Nm)	0,6	0,9	0,6	0,9	0,9	1,1	
Ballscrew	16 x 5	16 x 10	25 x 5	20 x 20	32 x 5	32 x 10	
(Nm)	0,5	0,8	0,5	0,8	0,7	0,9	
<b>Geometrical moments of inertia of aluminium profile</b>							
$I_x$ mm <sup>4</sup>	6,6x10 <sup>5</sup>		22,2x10 <sup>5</sup>		63,8x10 <sup>5</sup>		
$I_y$ mm <sup>4</sup>	38,6x10 <sup>5</sup>		122,0x10 <sup>5</sup>		335,0x10 <sup>5</sup>		
Elastic modulus N/mm <sup>2</sup>	70000		70000		70000		

For life-time calculation of rollers use our homepage.

Driving torque:

$$M_a = \frac{F \cdot P \cdot S_i}{2000 \cdot \pi \cdot \mu} + M_n$$

$$P_a = \frac{M_a \cdot n}{9550}$$

- F = force (N)
- P = thread pitch (mm)
- $S_i$  = safety factor 1,2 ... 2
- $M_n$  = no-load torque (Nm)
- n = rpm of screw (min<sup>-1</sup>)
- $M_a$  = driving torque (Nm)
- $\mu$  = screw efficiency
- $P_a$  = motor power (KW)


Efficiency of lead screws:

- All ballscrew 0,900
- Tr 18x4 0,399
- Tr 18x8 0,565
- Tr 24x5 0,384
- Tr 24x10 0,550
- Tr 32x6 0,360
- Tr 32x12 0,524

Deflection:

$$f = \frac{F \cdot L^3}{E \cdot I \cdot 192}$$

f = deflection (mm)  
 F = load (N)  
 L = free length (mm)  
 E = elastic modulus 70000 (N/mm<sup>2</sup>)  
 I = second moment of area (mm<sup>4</sup>)





For the diagram for critical speeds of lead screws refer to chapter 4.2



# Linear system DLT/DLK 120 P, 160 P, 200 P

Dimensions (mm)

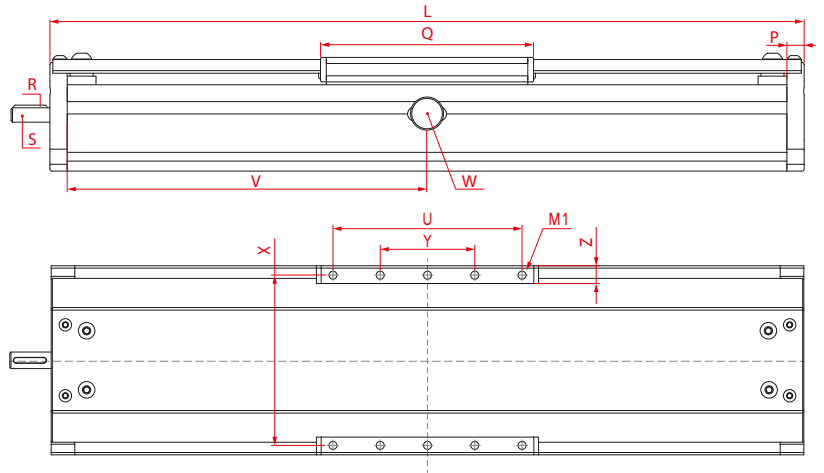

\*For slide nuts refer to chapter 2.2 page 2  
Increasing the carriage length will increase the basic length by the same amount.

**DL 120** M1 = M6 x 8 only 8 threaded holes in the carriage

**DL 160** M1 = M8 x 12 **DL 200** M1 = M10 x 12


V = Q + 100 mm W = servicing position

Size	Basic length L	A	C	D +0,1 +0,05	E	F	G	H	I	J	K	M for	N for	P	Q	Shaft		T	U	X	Y	Z	Basic weight	Weight per 100 mm
																R Key	S Ø h6 x length							
DL 120	220	120	39	47	78	42	42	10	67	82	79	M5	M6	12	152	3x3x25	10 x 27	M6	120	106	40	11,5	4,20 kg	1,16 kg
DL 160	277	160	53	62	90	50	60	11	89	109	106	M6	M8	20	196	5x5x28	14 x 35	M8	160	144	80	15	9,70 kg	1,98 kg
DL 200	340	200	66	68	140	60	60	15	110	133	129	M8	M10	20	256	6x6x40	22 x 45	M8	200	180	100	17	18,70 kg	3,16 kg

**T** Spindle: (T) Trapezoidal thread (K) Ballscrew


**1** Selection of screw: (1) right hand (Standard) (2) left hand (Ballscrew by inquiry)

**0** Choice of guide body profile: Stainless versions upon request.

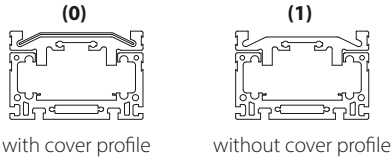

Size	Version 0		Version 2		Version 3	
	Q	L	Q	L	Q	L
120	152	220	192	260	>240	>308
160	196	277	250	331	>300	>381
200	256	340	330	414	>410	>494

**0** Choice of carriages:



**0** Drive version: (0) right (locating bearing side) (1) left (non-locating bearing side) (2) shaft on both sides

Selection of screw:	Size	Standard		Multistart screw				
		(0)	(1)	(1)	(2)	(3)	(4)	(5)
Ballscrew right hand	120	(0) 16x5	(1) 16x10	(2) 16x16	(3) 20x20*	(4) 25x5*	(5) 25x10*	
	160	(0) 25x5	(1) 20x20	(2) 25x10	(3) 25x25			
	200	(0) 32x5	(1) 32x10	(2) 32x20	(3) 32x32			
Ballscrew left hand		upon request						
Trapezoidal right hand thread	120	(0) 18x4	(1) 18x8					
	160	(0) 24x5	(1) 24x10					
	200	(0) 32x6	(1) 32x12					
Trapezoidal left hand thread	120	(0) 18x4	(1) 18x8					
	160	(0) 24x5	(1) 24x10					
	200	(0) 32x6	(1) 32x12					

**0** Ballscrew pitch accuracy: (0) 0,05 mm / 300 mm (Standard) (2) 0,025 mm / 300 mm

**0** End play of ball nut: (0) 0,04 mm (Standard), (1) < 0,02 mm, (2) 2% apply prestress

**DL T 160 P 1 0 0 0 0 0 0 1500** — Basic length + stroke = total length

Sample ordering code:  
DLT 160 P, trapezoidal right hand thread, with cover profile, standard carriage (0), right (locating bearing side), spindle (standard), 1220 mm stroke.