

TMH18

series



Product Segments


• Care Motion

General Features

Number of motors	1~5
Max. available buttons	10
Color	White, grey
IP rating	IP66W
Options	Backlight, hook, holder
Safety key	Available
Operational temperature range	+5°C~+45°C


Drawing

Standard Dimensions
(mm)

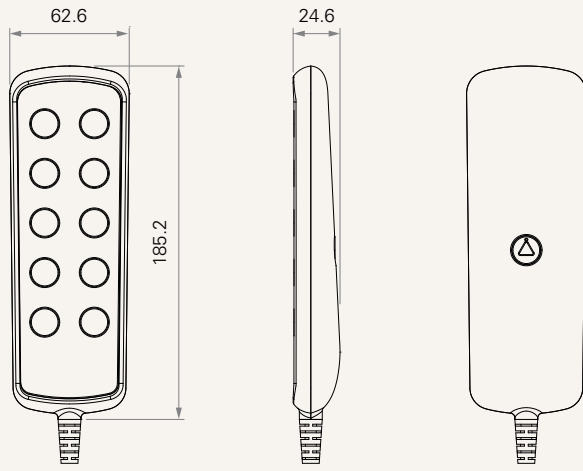

MCU	0 = Without	1 = With		
Control Box Type	0 = Without MCU	1 = With MCU control box		
Communication Type	2 = Switch type	4 = Bi-directional Scan		
PCBA	1 = General	2 = Power saving function		
Button Definition	See appendix* Note: please contact TiMOTION before making an order			
Backlight	0 = Without	1 = With		
Safety Key	1 = With			
Plug	4 = DIN 8P	5 = RJ 10P		
Plug Angle	1 = 90°	2 = 180°		
Cable Length (mm)	1~6 = 1~6 See page 4			
Color	2 = Pantone 428C	3 = Pantone 649C		
Hook	0 = Without	1 = Standard		
Holder	0 = Without	1 = Standard		
IP Rating	1 = Without	2 = IP54	3 = IP66	4 = IP66W

Cable Length

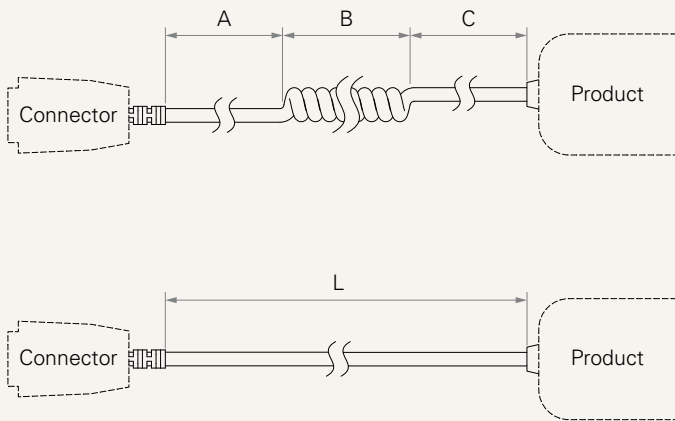

Cable Section (mm)			
CODE	A	B	C
1	1000	300	200
2	1200	300	300
3	1400	300	400
4	2400	0	0
5	100	600	100
6	1000	200	200

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.