TEK37_{series}

Single Column Desk Frame

General Features


Max. load	60kg
Speed	40mm/s
Weight of package	19kg
Standby power	< 0.1W
Accessories (optional)	USB Chargers (TFA1/TFA3), Anti-Collision
	Sensor (TCS1), Wireless Chargers (TWC)

Optional castor and battery available Remote control and Bluetooth receiver available Compact and lightweight packaging












TEK37 series

Dimension





• 2-Stage



Frame & Work Surface

Frame dimensions (mm)	Recommended work surface dimensions (mm)		
Length*Width (mm)	Length (mm)	Width (mm)	
300*300	400~650	400~650	

Height Range

Column type	Frame height (mm)	Stroke (mm)
3-stage (coffee table)	455~745	290
2-Stage (side table)	650~1050	400







Top Plate

Style A, thickness 3 mm



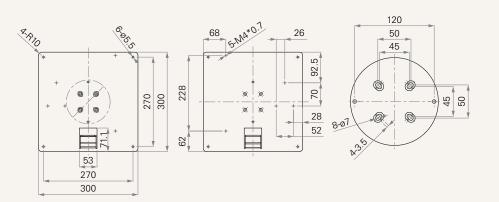


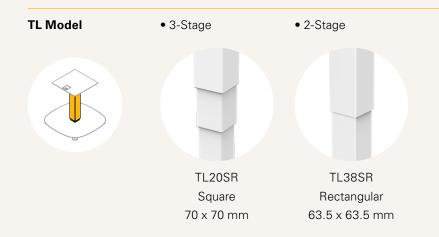





Freestanding

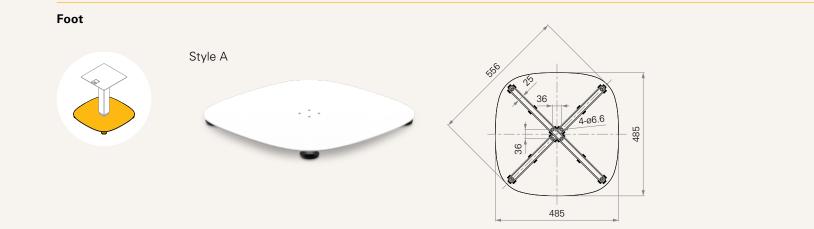





TL Model



3 = Shoe + movable casters







TEK37 series







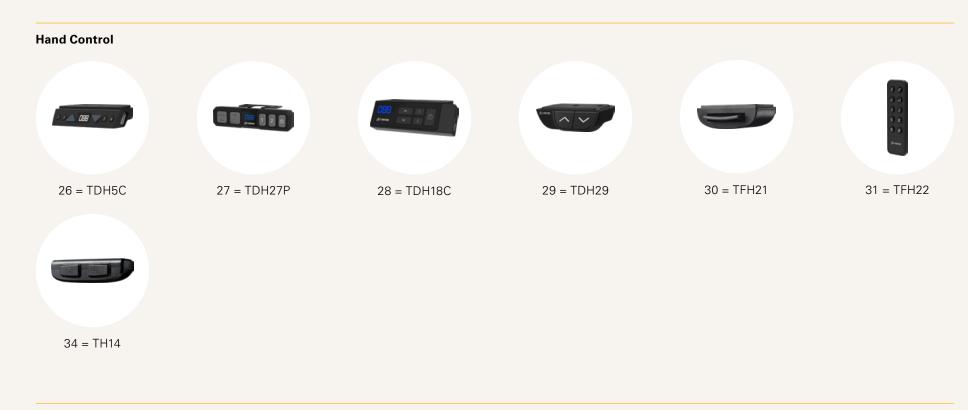

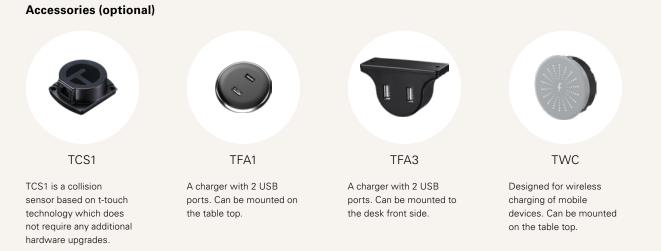



TEK37 Ordering Key

TEK37



			Version: 20240423
20SR = TL20SR 38SR = TL38SF	}		
1 = Style A, thickness 3, Standard			
0 = Without	1 = Style A, thickness: 3, Standard		
1 = Shoe (pre-assambled), standard 2 = Movable casters (inner box packag	e with wrench)	3 = Shoe + movable casters	
0 = Freestanding			
1 = Black, RAL 9005	2 = White, RAL 9016	3 = Grey, RAL 9006	4 = Special grey, RAL 9022
0 = Without 1 = TC11	2 = TC11P		
<u>See page 6-7</u>			
0 = Without			
E = English, TiMOTION logo, Black/Wh	ite printing	3 = Chinese, No logo, Black/White printing 4 = English, No logo, Black/White printing 5 = Chinese, No logo, colour printing 6 = English, No logo, colour printing	
	1 = Style A, thickness 3, Standard 0 = Without 1 = Shoe (pre-assambled), standard 2 = Movable casters (inner box packag 0 = Freestanding 1 = Black, RAL 9005 0 = Without 1 = Black, RAL 9005 0 = Without 1 = C11 See page 6-7 0 = Without 0 = Without C = Chinese, TiMOTION logo, Black/Wh 1 = Chinese, TiMOTION logo, colour pr	1 = Style A, thickness 3, Standard 0 = Without 1 = Style A, thickness: 3, Standard 1 = Shoe (pre-assambled), standard 2 = Movable casters (inner box package with wrench) 0 = Freestanding 1 = Black, RAL 9005 2 = White, RAL 9016 0 = Without 1 = TC11 2 = TC11P See page 6-7 0 = Without	1 = Style A, thickness 3, Standard 0 = Without 1 = Style A, thickness: 3, Standard 1 = Shoe (pre-assambled), standard 3 = Shoe + movable casters 2 = Movable casters (inner box package with wrench) 3 = Shoe + movable casters 0 = Freestanding 3 = Grey, RAL 9005 1 = Black, RAL 9005 2 = White, RAL 9016 3 = Grey, RAL 9006 3 = Grey, RAL 9006 0 = Without 1 = TC11 2 = TC11P See page 6-7 0 = Without 3 = Chinese, No logo, Black/White printing 0 = Without 3 = Chinese, No logo, Black/White printing 4 = English, No logo, Black/White printing 5 = Chinese, TiMOTION logo, Black/White printing 5 = Chinese, No logo, colour printing 1 = Chinese, TiMOTION logo, colour printing 5 = Chinese, No logo, colour printing

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.